

F-330BAH

SELF-CONTAINED FLAKER WITH BUILT-IN STORAGE BIN

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

F-330BAH

04/18/16

Item # 13200

FLAKER DIMENSIONS

W x D x H

F-330BAH

24 x 26 x 39*


*with 6" legs

F-330BAH


Air-Cooled



*FLAKED ICE DIMENSIONS



*approximate size, image not to scale

- Up to 330 lbs. of ice production per 24 hours
 - Up to 80 lbs. built-in storage*
 - Corrosion resistant stainless steel
 - Automatic flush system designed for longer life and dependability of ice machine
 - Evaporator assembly protected from peak loads
 - Convenient drop down door
 - Front access for easier maintenance
 - Removable air filter
 - Front in, front out airflow - allows for easier fit into tight spaces with no clearance needed on sides and rear
 - R-404A Refrigerant
 - Protected by H-GUARD Plus Antimicrobial Agent 
- * The F-330BAH is ENERGY STAR qualified.

Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Three Year - Parts & Labor on entire machine. (Serial numbers VxxxxxJ and after.)

Five Year - Parts on: Compressor, air-cooled condenser coil.

* Rated in accordance with AHRI Standard 820 (I-P)



ISO9001-ISO14001

© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com



Hoshizaki

SELF-CONTAINED FLAKER WITH BUILT-IN STORAGE BIN

DIMENSIONS

W x D x H

F-330BAH
24 x 26 x 39"
*with 6" legs

• Air-cooled

AIR-COOLED

Water Temp° F.	50°	70°	90°
Air Temp° F:			
70°	330	315	300
80°	290	280	270
90°	255	250	235

UTILITY CONSUMPTION

Model Number	KWH per 100 LBS.		Potable Water Gal. per 100 lbs.
	90/70	70/50	
F-330BAH	5.8	4.1	12.0

SPECIFICATIONS


Model Number	Condenser	Min. Circuit Ampacity	Shipping Weight
F-330BAH	Air-Cooled	N/A	178 lbs.

STORAGE BINS


Model Number	AHRI Rated Storage Capacity*
F-330BAH	Built-in 80 lb. capacity

* Rated in accordance with AHRI Standard 820 (I-P)


- Circuit breaker or fuse protects gear motor from overload.
- Gear motor runs one minute after termination of ice making to clear all ice from evaporator.

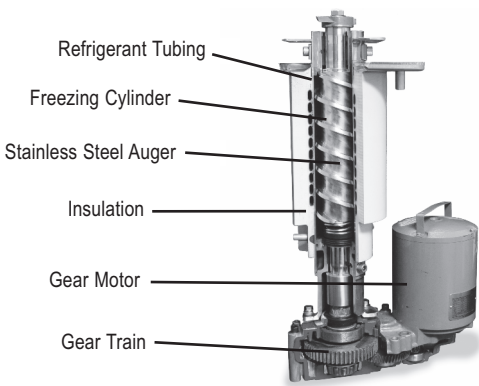


EVAPORATOR




TOP VIEW

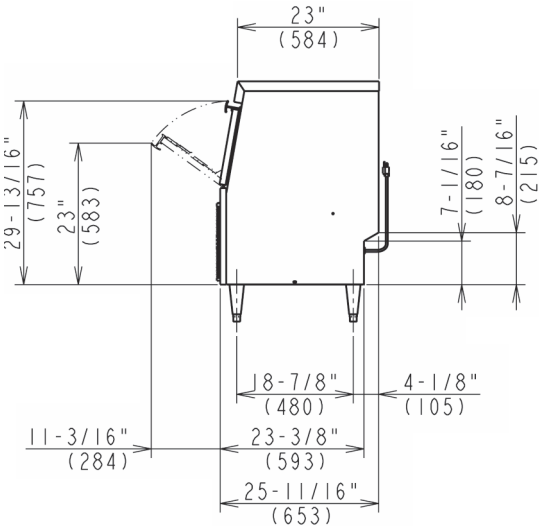

SIDE VIEW

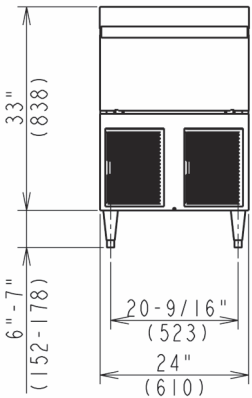

FRONT VIEW

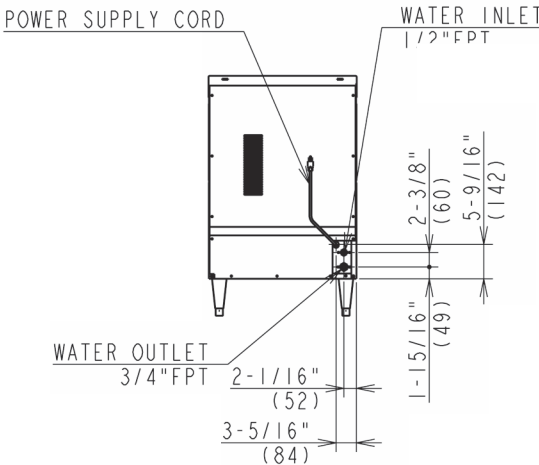

REAR VIEW

ELECTRICAL & PLUMBING/F-330BAH

- 115V/60/1
- Ice maker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Ice maker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 104 - 127V

SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filters



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com

Printed in U.S.A.

