



F-801MAJ(-C)

Modular Ice Machine Slim-Line Series



F-801MAJ(-C)
07/22/16
Item # 13037A

Item #: _____
 Project: _____
 Qty: _____
 AIA#: _____

W x D x H
22" x 27^{3/8}" x 26"

F-801MAJ ★
Air-Cooled Flaker

F-801MAJ-C ★
Air-Cooled Cubelet



Features

- ▶ Durable stainless steel exterior
 - ▶ Advanced CleanCycle24™ design 
 - ▶ Stainless steel auger with greaseless bearing
- F-801MAJ - Up to 751 lbs. of ice production per 24 hours
 - F-801MAJ-C - Up to 690 lbs. of ice production per 24 hours
 - Mount two units, side-by-side, in only 44" of floor space for double the amount of ice production
 - 2 second flush cycle every hour
 - Flush cycle removes sediment for cleaner ice
 - Infrared bin control for easy cleaning and reliability
 - R-404A Refrigerant

Available on Bins:

B-250PF B-500PF/SF B-800PF/SF B-1150SS B-1500SS*
B-300PF/SF B-700PF/SF B-900PF/SF B-1300SS B-1650SS*

Top kit may be required. See Bin Spec Sheets. *Two unit application only.

Warranty:


3 Year Parts & Labor on entire machine. 5 Year Parts on Compressor; air-cooled condenser coil. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.




| Condenser | Model | ICE PRODUCTION | | | WATER USAGE | | | ELECTRICAL | | | Heat Rejection BTU/hr. | Shipping Weight | ENERGY STAR® |
|------------|------------|--|-----------|-------------|-------------------------------------|---------------------------------------|---------------------------------|--|----------|-----------|------------------------|-----------------|--------------|
| | | Air / Water Temp Lbs. per 24 hours 70°/ 50°F | 90°/ 70°F | Type of Ice | Potable Gal. per 100 lbs. 90°/ 70°F | Condenser Gal. per 100 lbs. 90°/ 70°F | kWh Used per 100 lbs. 90°/ 70°F | Max. Fuse Size or HACR Circuit Breaker | Amperage | Voltage | | | |
| Air-Cooled | F-801MAJ | 751 | 566 | Flaked | 12.0 | N/A | 4.5 | 15A | 11.8A | 115V/60/1 | 5,900 | 205 lbs. | ★ |
| Air-Cooled | F-801MAJ-C | 690 | 532 | Cubelet | 12.0 | N/A | 5.00 | 15A | 11.8A | 115V/60/1 | 5,000 | 205 lbs. | ★ |

Cube Dimensions*

Flaked
F-801MAJ



Cubelet
F-801MAJ-C



* approximate size in inches, image not to scale

Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 104-127V

Service

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filter (Air-cooled model only)
- Allow 6" (15 cm) clearance at rear and sides, and 24" (61 cm) clearance at top for proper air circulation and ease of maintenance/service.

Plumbing

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

Water-Cooled Model (Lines Must Be Independent of Icemaker)

- Condenser Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Condenser Drain/Return Line: Minimum 1/4" Nominal ID Hard Pipe (open drain system) or Copper Water Tubing (closed loop system) or Equivalent




F-801MAJ(-C)

Modular Ice Machine
Slim-Line Series




F-801MAJ(-C)
07/22/16
Item # 13037A


FRONT VIEW AIR-COOLED

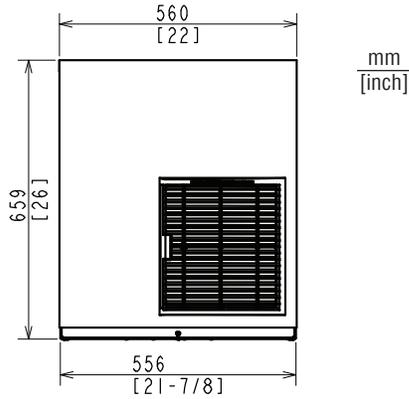

SIDE VIEW AIR-COOLED

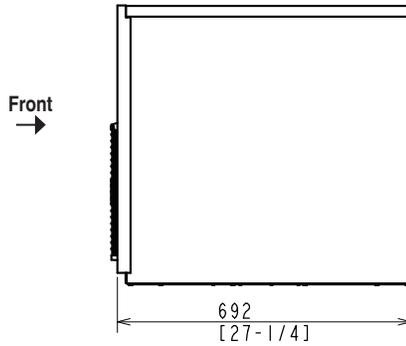

REAR VIEW AIR-COOLED

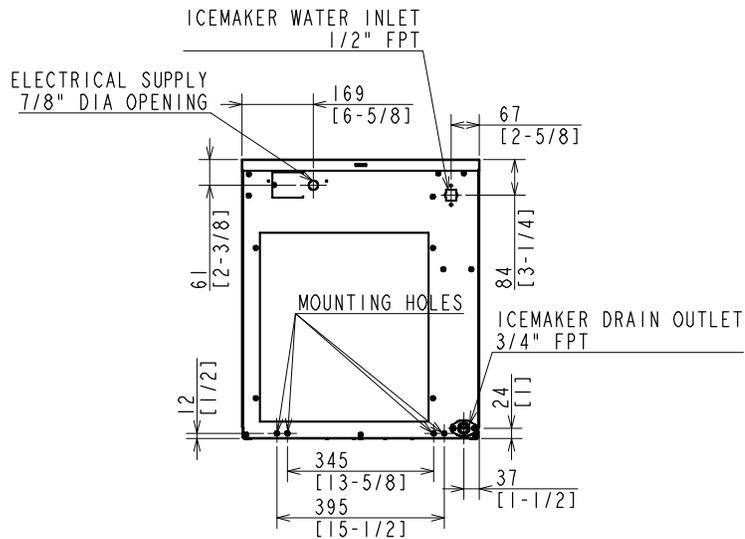

BOTTOM VIEW AIR-COOLED

